

## TECHNICAL DATA


## R SERIES SLOT CLOSURES

### DESCRIPTION

PAR 'R' Series Slot Closures are manufactured from a range of PAR flexible insulation materials and are pre-formed, to ensure easy insertion into slots.

### APPLICATIONS

PAR 'R' Series Slot Closures are designed for closing the top of slots in electric motor and generator stators and rotors.

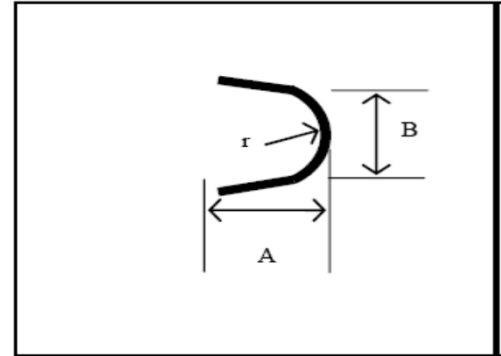

### MATERIALS

PAR 'R' Series Slot Closures can be manufactured from the following base materials:

Base Material	Thermal Class	Standard Thicknesses
PET Film	130°C (Class B)	0.25mm, 0.35mm
Hypertherm® F N/M/N	155°C (Class F)	0.43mm (3/10/3)
Parmef D/M/D	155°C (Class F)	0.35mm (2/10/2)
Nomex® Type 410	220°C (Class C)	0.38mm

### STANDARD DIMENSIONS

Ref	Flat mm	A mm	B mm	r mm
R8	8	3.3	3.6	1.6
R10	10	3.7	3.9	1.5
R12	12	4.3	5.0	2.0
R14	14	4.8	5.0	2.0
R15	15	5.6	6.4	3.0
R18	18	6.7	7.2	3.0
R21	21	7.8	7.9	3.0
R24	24	9.0	9.0	3.5
R32	32	10.0	16.0	4.0

Other base materials and sizes are available on request.

### SUPPLY FORMATS

Standard lengths	700mm or 1000mm
Standard pack sizes	143 units @ 700mm long or 100 units @ 1000mm long
Cut lengths	To order

® Registered trademark

Statements, technical information and recommendations contained herein are based on tests we believe to be reliable but they are not to be construed in any manner as warranties expressed or implied. The user shall determine the suitability of the product for their intended use and the user assumes all risk and liability whatsoever in connection therewith.

